

2 panel colonial door

HMF Express knows how important first impressions are. With our high definition two-panel colonial door, the impression will resonate with everyone passing by your entryway.

Base model features

- HD 2 panel design
- 18 gauge galvanized (A60) only
- 14 gauge top and bottom channels
- 14 gauge full height continuous hinge & lock channel reinforcement
- Polystyrene insulated core
- Baked-on grey primer

Base model construction options


- Rigid interlocked edge or bonded edge seam construction
- Square or beveled edge
- 1 3/8", 1 3/4", 2" or 2 1/4" thickness
- Minimum 2'8", maximum 3'4" opening

Additional construction options

- Seamless available- tack & filled only
- WH fire rated to 90 minutes
- Custom hinge, lock, exit device, strike, flush bolt, closer, electrified, and other hardware preps available to order

Preps and reinforcements

- 7 gauge hinge
- 16 gauge 161 Lock
- 14 gauge 86 Lock
- 14 gauge closer

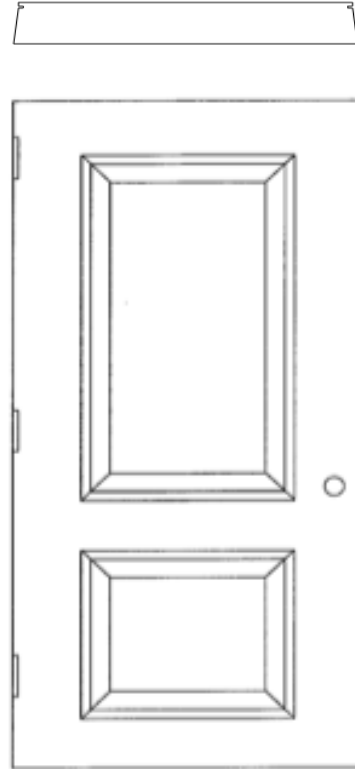

Core details

- 0.7 to 1.0 density polystyrene

Estimated Performance

- Acoustical value - [STC 32](#)
- [R value](#) - 6.87
- [U value](#) - .146

Labels

- [UL](#)
- [Miami-Dade](#)

Lead time options

- Standard base model: 8-10 days
- Express base model: 3-5 days
- Turbo base model: 1-3 days
- [STC](#): 10-20 days

Related Products

- 2-panel arched top
- 2-panel soft arch
- Embossed doors
- Frame types
- Specialty frames
- Door components